


M03SS OUTDOOR CAMERA HOUSING

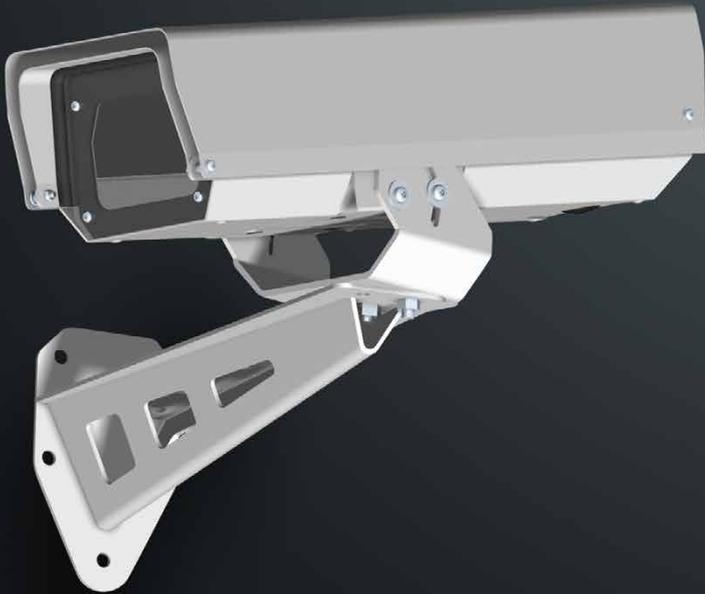

The M03 range of housings are designed to accommodate a wide range of analogue and IP addressable CCD camera and lens combinations. The body accommodates larger camera and lens combinations up to 405mm long and 126mm wide.

The IP66 rated M03SS outdoor housing features light weight construction in 304 grade stainless steel for corrosive environments. It incorporates a swing open lid for ease of camera installation and adjustment. The pan tilt being side mounted provides greater stability for the camera mount platform. A motorised pan tilt mechanism may be attached to 4 x M6 sockets on a 101.6mm PCD base mount.

As standard, the M03SS housing comes complete with a pan tilt bracket. Choose from the standard or extended wall bracket and pole mount hardware to suit other applications.

APPLICATIONS

Due to the extensive range of mounting hardware, the M03 series can be mounted in the most demanding sites.

With the ability to tilt down in excess of 55 Degrees for viewing closer to mounting position, the housing is ideal for walkways and looking up and down staircase and pole mount applications.

FEATURES

- Swing open lid for easy access when on a ladder.
- Off-centre locking fasteners on the pan and tilt to securely lock the camera aim. This greatly reduces the opportunity for misalignment of the camera by vandals.
- Housing tilts down in excess of 55 degrees for viewing close to mounting position- ideal for staircases.
- Camera can be set up through the lens reducing time installing and removing on set up.
- Range of extended wall mount brackets, parapet mounts, pole mount and wall mount adapters and electrical accessories.

SPECIFICATIONS

Construction	304 grade stainless steel.
Finish	Dulux powder coat in Off-White Satin finish.
Lens	6mm acrylic. Optional Quartz glass optical lens for high resolution and long zoom camera and lens combinations.
Cable Entry	2 x 20mm cable entry at rear.
Access	1 x M6 post cap security screw.
Electrical	Optional heater thermostat - 24 VAC 50Hz 11 Watts. Optional fan - 24 VAC 50Hz 3.2 Watts.
Max Camera Size	405mm (L) x 126mm (W) x 89mm (H).
Weight	4.3kg.

ALSO AVAILABLE

M03AL aluminium variation for general purpose applications.

M02AL smaller aluminium outdoor housing for general purpose applications.

M02SS smaller stainless steel outdoor housing for corrosive environments.



PARTS LIST

HOUSINGS

M03SS Stainless steel outdoor housing with swing open lid access. Comes complete with pan tilt. For larger camera and lens combinations up to 405mm (L) x 126mm (W) x 89mm (H). 101.6mm PCD base mount provided for motorised PTZ mounting.

SHIELDS, BRACKETS & MOUNTS

M03SSSHIELD Stainless steel sunshield to suit M03SS in Off-White Satin.

WB360 360mm reach stainless steel wall mount bracket in Off-White Satin.

M02PTSS Aluminium pan tilt bracket to suit M02SS & M03SS in Off-White Satin. (Included in M03SS)

CWB1000SS 1000mm projection stainless steel cantilever wall bracket in Off-White Satin.

POLEMTSS Stainless steel pole adaptor to suit M02 & M03 housing brackets in Off-White Satin.

PARAPETSS Stainless steel parapet mount in Off-White Satin.

ELECTRICAL

MHTR Lens heater demister with fixed point thermostat (15deg c) 24 VAC to suit M02, M03 & M12 housings.

MHTRFAN Fan heater with fixed point thermostat (15deg c) 24 VAC to suit M02, M03 & M12 housings.

M02TSW Tamper switch to suit M02, M03 & M12 housings.

M02VIBSW Tilt vibration sensing switch to suit M02, M03 & M12 housings.

DIMENSIONS

